


TUBING AND CASING ROLLERS

Instruction Manual 6200

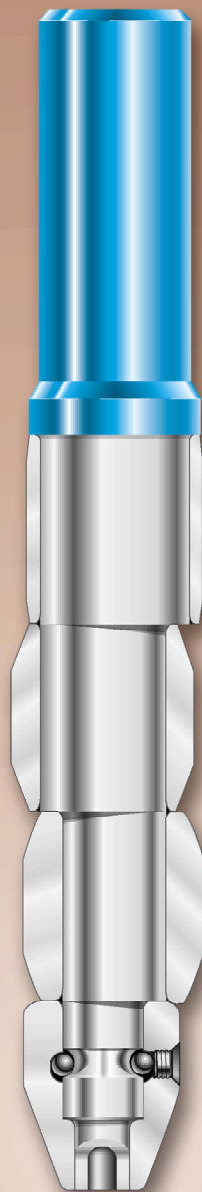

Tubing and Casing Rollers

Tubing and Casing Rollers

I
N
D
E
X

Tubing and Casing Rollers	
General Description	3
Use	3
Construction	3
Operation	3
Disassembly	5
Reassembly	5
Specifications and Replacement Parts	6 – 7
Range Sheet	7

The designs and specifications for the tools described in this instruction manual were in effect at the time this manual was approved for printing. National Oilwell Varco, whose policy is one of continuous improvement, reserves the right to discontinue models at any time, or to change designs and specifications without notice or without incurring obligation.

Twentieth Printing, September 2005

General Description

The **Bowen Tubing and Casing Roller** is specifically designed for reconditioning casing and differs from any other tool intended for this use in that it does not contain any small parts to be worn, broken or lost in the well.

The Bowen Tubing and Casing Roller is extremely rugged yet simple in design. All moving parts are held in place on the Mandrel by large ball bearings running in deep grooves.

Use

The Bowen Tubing and Casing Roller is used specifically to recondition and restore buckled, collapsed or dented well tubing and casings to their normal internal diameter and roundness. It is designed to enter into the smaller I.D. of the damaged casing. As it is rotated and forced downward, it exerts lateral pressure on the casing to restore it to its normal I.D.

Construction

The Bowen Tubing and Casing Roller is manufactured from special alloy steels selected for their ability to resist wear. The Mandrel and all Rollers are case hardened for further wear qualities.

The Bowen Tubing and Casing Roller consists of an eccentric Mandrel upon which are mounted a series of Rollers and a tapered Nose Cone. The upper end of the Mandrel is fitted with a threaded box connection for connection to the drill pipe. The tapered Nose Cone locks all Rollers in place on the Mandrel by large ball bearings running in deep grooves in the Mandrel and the Nose Cone.

The design of the Bowen Tubing and Casing Roller permits the use of interchangeable Rollers to be used on each size Mandrel. (See Table) The large bearing areas between the Rollers and the eccentrics effectively reduce bearing

pressures, therefore increasing tool life.

Operation

Make up the BOWEN TUBING and CASING ROLLER to either the drill collars or to the drill pipe; experience has shown that it is preferable to connect direct to the drill pipe.


The drill pipe and the roller are rotated slowly and lowered gradually through the casing until the damaged area is located and contacted. Upon contact with the collapsed casing, increase the rotary speed to 40-75 RPM, start circulation and lower slowly.

The reduced portion of the tapered Nose Cone readily enters between the walls of the collapsed casing. As the Mandrel is rotated and lowered, the eccentrics force the Nose Cone and Rollers outwardly against the casing walls with great lateral pressure restoring the casing to its normal I.D. and roundness.

Moderate to heavy weight should be applied during operation. The use of too little weight, with high rotational speeds should be avoided. Light weight with high speeds tends to wear the rollers without straightening the pipe. If insufficient weight is available in the running string, drill collars should be added. The best guide to the amount of weight and rotational speed to use is experience; as long as steady downward progress is made by the Casing Roller, the weight-speed ratio is giving the proper results.

Badly damaged casing will require the maximum amount of weight for the Roller to enter into and straighten the casing. The rugged construction of the BOWEN TUBING and CASING ROLLER allows the operator to apply the maximum amount of weight and torque without damage to the tool.

CIRCULATION MUST BE MAINTAINED DURING THE OPERATION!

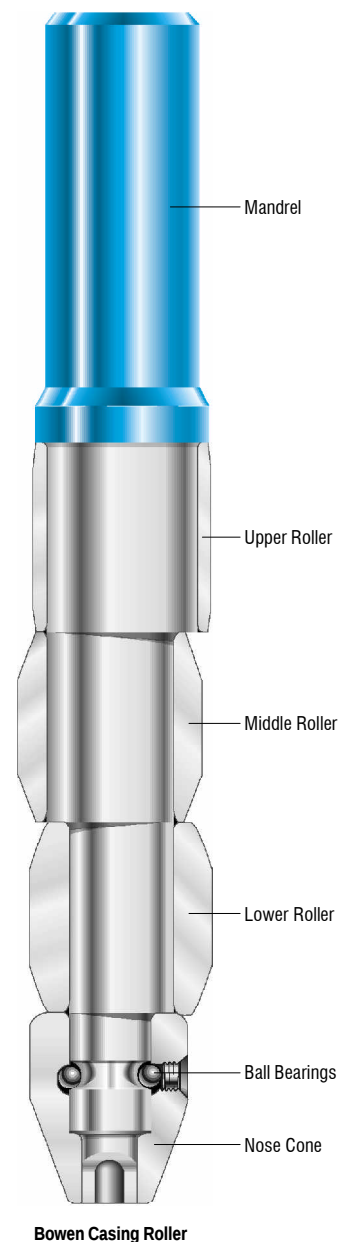

Disassembly

The Bowen Tubing and Casing Roller requires only a minimum of maintenance. Like any tool, it should be thoroughly cleaned and greased after use and before storage. To disassemble:


1. With an Allenhead wrench, remove the Loading Slot Set Screw. (This is a Nylok set screw. You will notice a nylon dot midway of the threads on one side. Do not destroy this dot.)
2. Shake or dump Ball Bearings from inside the Nose Cone out through the Loading Slot (see Table for the number of ball bearings for the respective sizes of Nose Cones).
3. Slide Rollers off the eccentric Mandrel.
4. Thoroughly wash and clean the Mandrel, and the Rollers.

If for any reason it is desired to release the Casing Patch from the casing string, proceed as follows:

Reassembly

1. Before assembly, check the size of the Rollers to ascertain that the correct sizes are at hand. The size of the casing is stamped on the top outside edge of each Roller.
2. Thoroughly grease the eccentrics on the Mandrel and the interior of each roller particularly, the ball bearing grooves on the Mandrel and inside the Nose Cone.
3. Slide the Rollers onto the Mandrel. Each Roller is made to close tolerance so there should be no difficulty in proper assembling.

4. Slide Nose Cone in place on the Mandrel.
5. With the Casing Roller horizontal, drop Ball Bearings, one by one, into the loading slot. Rotating Nose Cone back and forth will help to distribute the bearings around the groove. (See Table for the proper number of ball bearings for the respective sizes of Nose Cones.)
6. Insert and make up Loading Slot Set Screw into the Loading Slot. This is a Nylok set screw especially machined to seat into a shoulder. Make up tightly with an Allen wrench until it seats firmly.

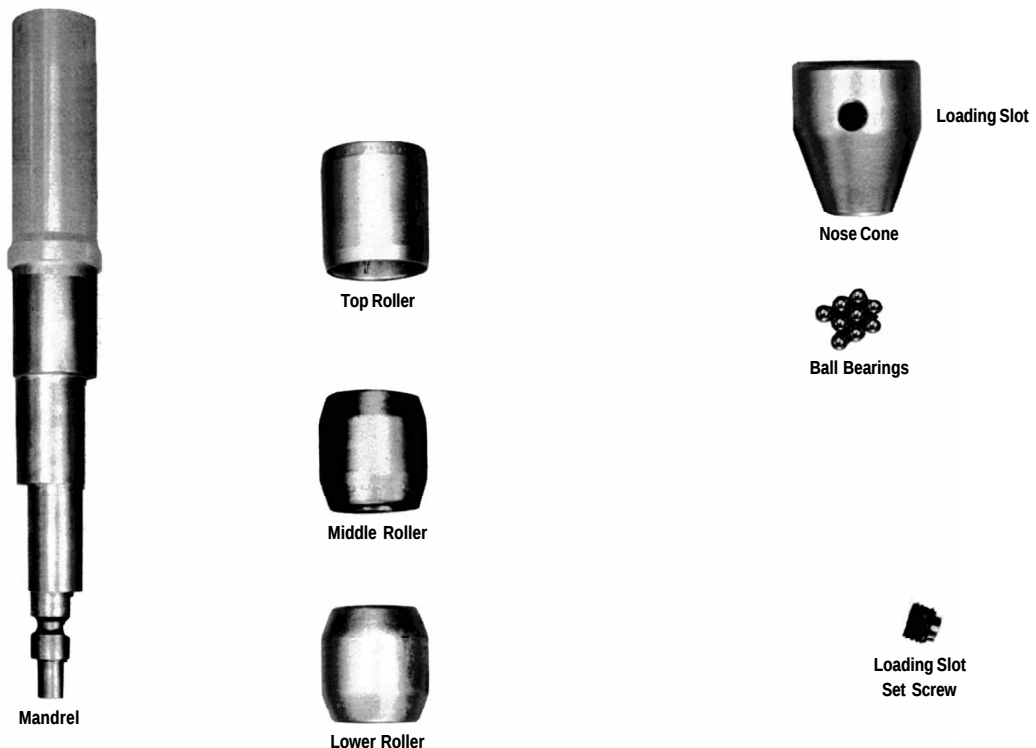

Bowen Tubing And Casing Rollers

		2-3/8	2-7/8	3-1/2	4	4-1/2	5-1/2	6-5/8	7-5/8	9	10-3/4	13	16
To Roll		Tub.	Tub.	Tub.	3-1/2	4-3/4	5-3/4	7	8-5/8	9-5/8	11-3/4	13-3/8	18-5/8
Casing Size					L.P.	5	6			10	12		
					4 Tub.								
Top Connection		1" DSS	1-13/16	API	EUE	API	API	API	API	API	API	API	
		Hardy	F.J.	1-1/4	1-1/2	2-3/8	2-7/8	3-1/2	4-1/2	4-1/2	6-5/8	6-5/8	6-5/8
		Griffin		Reg.		Reg.	Reg.	Reg.	Reg.	Reg.	Reg.	Reg.	Reg.
Circulation Hole		3/8	3/8	5/16	1/4	1/2	5/8	1	1-1/4	1-1/2	1-3/4	2	2
Length of													
Individual		3	3	3	4	4	5	6	7	8	9	10	11
Rollers													
Complete	Part No.	28802	26395	29046	28963	20660	20910	20920	20930	20940	20950	20960	20970
Assembly	Weight	11-1/4	40	22	41-1/4	60	128	171	256	392	890	1349	1690

Replacement Parts

Mandrel	Part No.	28803	26396	29051	28964	20661	20911	20921	20931	20941	20951	20961	20971
	Weight	6	22	12	26	33	68	80	116	160	600	950	1000
Nose	Part No.	28807	26400	29050	28965	20662	20912	20922	20932	20942	20952	20962	20972
Cone	Weight	1	3	2-1/4	3-1/4	5-1/4	6	17	30	42	60	120	340
Lower	Part No.	28806	26399	29049	28966	20663	20913	20923	20933	20943	20953	20963	20973
Roller	Weight	1-3/4	5	2-13/16	6-3/4	9	16	28	40	80	90	160	250
Middle	Part No.	28805	26398	29048	28967	20664	20914	20924	20934	20944	20954	20964	20974
Roller	Weight	1-1/2	4	2-3/4	4	8	16	26	40	80	90	110	250
Upper	Part No.	28804	26397	29047	28968	20665	20915	20925	20935	20945	20955	20965	20975
Roller	Weight	1	3	2	1-1/4	5	9	20	20	30	50	105	250
Ball	Part No.	17294	17294	27940	20666	20666	20666	20926	20936	20936	20936	20966	20966
Bearings	Weight	1/16	1/16	1/16	1/16	1/16	1/16	1/8	1/4	1/4	1/4	1/2	1/2
	No. Req'd.	9	13	8	7	9	13	15	12	16	24	21	27
Loading	Part No.	28808	26401	29052	20667	20667	20667	20927	20937	20937	20937	20967	20967
Slot Set	Weight	1/16	1/16	1/16	1/16	1/16	1/16	1/8	1/4	1/4	1/4	1/2	1/2
Screw													

How To Order:

Specify: (1) Name and Number of Assembly or Part.
(2) Casing O.D. and Weight.
(3) Top Connection, if other than Standard.

Recommended Spares:

(1) 1 Middle Roller, each Casing Size.
(2) 1 Nose Cone, each Casing Size.
(3) 1 Set of Ball Bearings.
(4) 2 Loading Slot Set Screws.

NOTE: For prices, refer to Section 6200 of the Bowen Price Manual.

Bowen Tubing And Casing Rollers - Range Sheet

Casing		Upper Roller			Middle Roller			Lower Roller			Nose Cone			Mean Casing Drift Dia. (Tool Rolls)
Size	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	
2-3/8	4.6	28804	1.750	1	28805	1.938	1-1/2	28806	1.750	1-3/4	28807	1.562	1	1.901
2-7/8	6.4	26397	2.187	3	26398	2.360	4	26399	2.187	5	26400	1.875	3	2.347
3-1/2	7.7	29047	2.812	2	29048	2.674	2-3/4	29049	2.812	2-3/4	29050	2.437	2-1/4	2.943
4	9.5	28968	3.219	1-1/4	28967	3.281	4	28966	3.219	6-3/4	28965	2.875	3-1/4	3.423

Casing		Upper Roller			Middle Roller			Lower Roller			Nose Cone			Mean Casing (Tool Rolls)				
Size	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.					
4-1/2	9.5	20665	3.688	3-1/2	20664	3.875	7-1/2	20663	3.688	8	20662	3.125	5-1/4	4.032				
	11.6					3.688	5-1/2							3.938				
	13.6					3.526	4-1/2							3.859				
4-3/4	15.75		3.688	3-1/2		3.875	7-1/4		3.688	8				4.032				
5	11.5					4.250	10							4.250	12	4.500		
13.0						4.114	9									4.438		
	15.0		4.000	5-1/2		4.192	9-1/2		4.000	10-1/2				4.343				
	17.7					3.976	8							4.234				
	18.0					3.965	8							4.218				
	21.0		3.688	3-1/2		4.000	8		3.688	8				4.094				
5-1/2	13.0	20915	4.662	9	20914	4.802	14	20913	4.662	16	20912	3.750	6	4.982				
	14.0					4.738	14							4.950				
	15.0					4.666	13							4.912				
	15.5		4.609	9			13		4.609	16				4.888				
	17.0					4.554	11							4.830				
	20.0					4.574	11							4.359	13	4.716		
	23.0		4.359	6		4.358	10		4.359	13				4.608				
5-3/4	14.0					4.875	12							5.082	17	4.875	19	5.228
	17.0						4.894							15			5.128	
	19.5	4.662	9	4.894	15	4.662	16	5.028										
	22.5					4.694	14							4.928				
6	15.0					5.125	15							5.300	20	5.125	22	5.462
	16.0						5.250							19			5.438	
	18.0		5.100	18			5.362											
	20.0					4.956	16							5.290				
	23.0					4.875	12							4.982	17	4.875	19	5.178
6-5/8	17.0					20925	5.734							15	20924	5.910	24	20923
	20.0	5.745	22	5.987														
	22.0	5.609	13	5.745	22			5.609	25	5.927								
	24.0					5.609	20							5.859				
	26.0					5.478	18							5.793				
	26.0						5.442							17			5.775	
	28.0					5.350	16							5.729				
	29.0					5.359	10							5.547	18	5.359	22	5.699
	32.0						5.375							16			5.613	
7	17.0		6.250	24		6.202	29		6.250	36		5.500	22	6.476				
	20.0					6.038	25							6.394				
	22.0					6.000	20							6.164	26	6.000	32	6.336
	23.0					6.108	26							6.304				
	24.0					6.000	20							6.048	25	6.000	32	6.274
	26.0					5.830	16							6.094	26	5.830	28	6.214
	28.0					5.970	25							6.152				
	29.0						5.910							24			6.122	

Bowen Tubing And Casing Rollers - Range Sheet (Continued)

Casing		Upper Roller			Middle Roller			Lower Roller			Nose Cone			Mean Casing Drift Dia. (Tool Rolls)
Size	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	
7	30.0					5.854	23							6.092
	32.0		5.734	15		5.830	23		5.734	27		5.000	17	6.032
	35.0		5.609	13		5.776	22		5.609	25				5.942
	38.0					5.609	20							5.858
	40.0					5.442	17							5.774
7 ⁵ / ₈	20.0	20935	6.500	23	20934	6.875	42	20933	6.500	43	20932	5.375	30	7.062
	24.0					6.676	39							6.963
	26.4					6.562	37							6.906
	29.7		6.188	18		6.686	42		6.188	40				6.812
	33.7					6.468	35							6.703
	39.0					6.188	30							6.563
8 ⁵ / ₈	24.0	20935	7.562	44	20934	7.758	62	20933	7.562	67	20932	6.500	48	8.035
	28.0					7.594	56							7.955
	32.0		7.375	39		7.594	56		7.375	62				7.859
	36.0					7.402	54							7.763
	38.0					7.302	52							7.713
	40.0		7.125	38		7.452	54		7.125	58		6.000	40	7.663
	43.0					7.304	52							7.589
	44.0					7.250	44							7.563
	49.0					7.024	45							7.449
9	34.00	20945	8.000	44	20944	7.676	50	20943	8.000	74	20942	6.625	42	8.212
	38.00		7.718	37		7.768	52		7.718	67				8.118
	40.00					7.676	50							8.072
	45.00		7.343	27		7.812	54		7.343	57				7.954
	55.00					7.375	43							7.734
	9 ⁵ / ₈	29.30	8.500	58		8.720	82		8.500	88				8.985
		32.30				8.696	81							8.973
		36.00				8.438	75							8.843
		40.00	8.250	51		8.514	77		8.250	81				8.757
	43.00					8.354	70							8.677
	47.00		8.000	44		8.456	76		8.000	74				8.603
	53.50					8.164	63							8.457
	10		8.812	70		9.050	91		8.812	100				9.306
10 ³ / ₄	32.75	20955	9.500	36	20954	9.728	78	20953	9.500	96	20952	8.250	60	10.114
	40.00					9.444	68							9.976
	40.50													9.972
	45.00					9.254	59							9.882
	45.50													9.872
	48.00					9.148	54							9.824
	51.00		9.250	27		9.294	60		9.250	87				9.772
	54.00					9.162	56							9.706
	55.50					9.114	50							9.682
	11 ³ / ₄	38.0	10.250	36		10.896	122		10.250	128		8.750	80	11.072
		42.00				10.754	113							11.002
		47.00				10.594	108							10.922
		54.00				10.354	104							10.802
	60.00					10.138	95							10.694
	12		10.750	90		10.862	120		10.750	150				11.306
13	40.00	20965	11.625	105	20964	11.846	118	20963	11.625	158	20962	10.00	120	12.360
	45.00					11.677	107							12.282
	50.00					11.534	100							12.204
	54.00					11.410	95							12.142
	13 ³ / ₈	48.00	12.000	75		12.024	118		12.000	178				12.637
		54.50				11.812	117							12.537
		61.00				11.625	107							12.437

Bowen Tubing And Casing Rollers - Range Sheet (Continued)

Casing		Upper Roller			Middle Roller			Lower Roller			Nose Cone			Mean Casing Drift Dia. (Tool Rolls)
Size	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	Part No.	O.D.	Wt.	
13- ³ / ₈	68.00		11.625	105		11.812	102		11.625	158				12.337
	72.00					11.677	97							12.269
	83.00					11.320	93							12.097
	85.00					11.288	90							12.081
16	55.00	20975	14.500	146	20974	14.844	250	20973	14.500	284	20972	14.00	340	15.297
	65.00					14.554	234							15.172
	75.00					14.344	220							15.047
	84.00					14.114	210							14.932
18- ⁵ / ₈	78.00		17.000	325		17.304	440		17.000	463				17.777
	87.50					17.104	392							17.104
	96.50					16.904	370							17.577

Corporate Headquarters

10000 Richmond Avenue
Houston, Texas 77042
United States
Phone: 713 346 7500
Fax: 713 346 4493

Alaska
4111 Ingra
Anchorage, Alaska 99503
United States
Phone: 907 563 5253
Fax: 907 561 0071

California
4117 Atlas Court
Bakersfield, California 99308
United States
Phone: 661 395 0165
Fax: 661 328 1827

Louisiana
108 Nova Drive
Broussard, Louisiana 70518
United States
Phone: 337 839 2400
Fax: 337 839 2211

190 Thompson Road
Houma, Louisiana 70363
United States
Phone: 985 851 1111
Fax: 985 851 1117

Mississippi
2930 Industrial Blvd.
Laurel, Mississippi 39440
United States
Phone: 601 649 8671
Fax: 601 649 8673

New Mexico
#14 CR 5860
Farmington, New Mexico 87401
United States
Phone: 505 326 4303
Fax: 505 326 4304

North Dakota
3202 1st Avenue West
Williston, North Dakota 58801
United States
Phone: 701 774 0091
Fax: 701 774 0092

Oklahoma
3800 Thomas Road
Oklahoma City, Oklahoma 73179
United States
Phone: 405 677 2484
Toll Free: 877 760 1711
Fax: 405 677 2457

Texas
1249 Commerce Road
Alice, Texas 78332
United States
Phone: 361 664 8013
Fax: 361 664 0462

8411 Irvington Boulevard*
Houston, Texas 77022
United States
Phone: 713 691 7800
Fax: 713 691 7807

2810 Highway 135 North
Kilgore, Texas 75662
United States
Phone: 903 984 2553
Fax: 903 984 7170

10720 West I-20 East
Odessa, Texas 79765
United States
Phone: 432 563 1173
Fax: 432 563 1182

30444 Southwest Freeway
Rosenberg, Texas 77471
United States
Phone: 281 341 5365
Fax: 281 344 1986

Utah
1553 East Highway 40
Vernal, Utah 84078
United States
Phone: 435 789 0670
Fax: 435 789 6568

West Virginia
Route 2, Murphy Run Road
Clarksburg, West Virginia 26301
United States
Phone: 304 622 4303
Fax: 304 623 2174

Wyoming
1283 N. Derrick Drive
Unit 1, Box 2
Casper, Wyoming 82604
United States
Phone: 307 237 3100
Fax: 307 237 2546

Canada
9120 – 34A Avenue
Edmonton, Alberta T6E 5P4
Canada
Phone: 780 702 5209
Fax: 780 463 2348

3550 93 Street*
Edmonton, Alberta T6E 5N3
Canada
Phone: 780 944 3929
Fax: 780 430 0760

1100 540 5th Avenue SW (Mailing)
1010 540 5th Avenue SW (Office)
Calgary, Alberta T2P 0M2
Canada
Phone: 403 250 8000
Fax: 403 294 5790

England
2 Isbourne Way
Winchcombe
Cheltenham
Glos, GL54 5NS
England
Phone: 44 (0) 1242 603975
Fax: 44(0) 1242 602614

Dubai
Nr. R/A 13, Daimler Chrysler Street
P.O. Box 61490
Jebel Ali Free Zone
Dubai
UAE
Phone: 971 4 8838776
Fax: 971 4 8838795

Indonesia
Cilandak Commercial Estate Unit 105
Jl. Raya Cilandak KKO
P.O. Box 7541
Jakarta, 12560
Indonesia
Phone: 62 21 782 6088
Fax: 62 21 782 6086

Scotland
10 Kirkton Avenue
Pitmedden Road Industrial Estate
Dyce, Aberdeen AB21 0BF
Scotland
Phone: 441 224 334800
Fax: 441 224 723034

Singapore
9 Tuas Avenue 5
Singapore, 639335
Singapore
Phone: 65 68611566
Fax: 65 68610728

Germany
Edesser Straße 1
31234 Edemissen Berkhöpen
Postfach 31232
Germany
Phone: 49 5176 97670
Fax: 49 5176 9767 22

* Denotes Manufacturing and Engineering facilities

Downhole Solutions

Drilling Solutions

Engineering and Project Management Solutions

Lifting and Handling Solutions

Production Solutions

Supply Chain Solutions

Tubular and Corrosion Control Solutions

Well Service and Completion Solutions